



Cert. No. LRQ 0963008

ISO 9001


spirax/sarco

TI-P072-02
ST Issue 2

Capacity Charts for HM34


Inverted Bucket Steam Traps

Capacities
1/2" / DN15

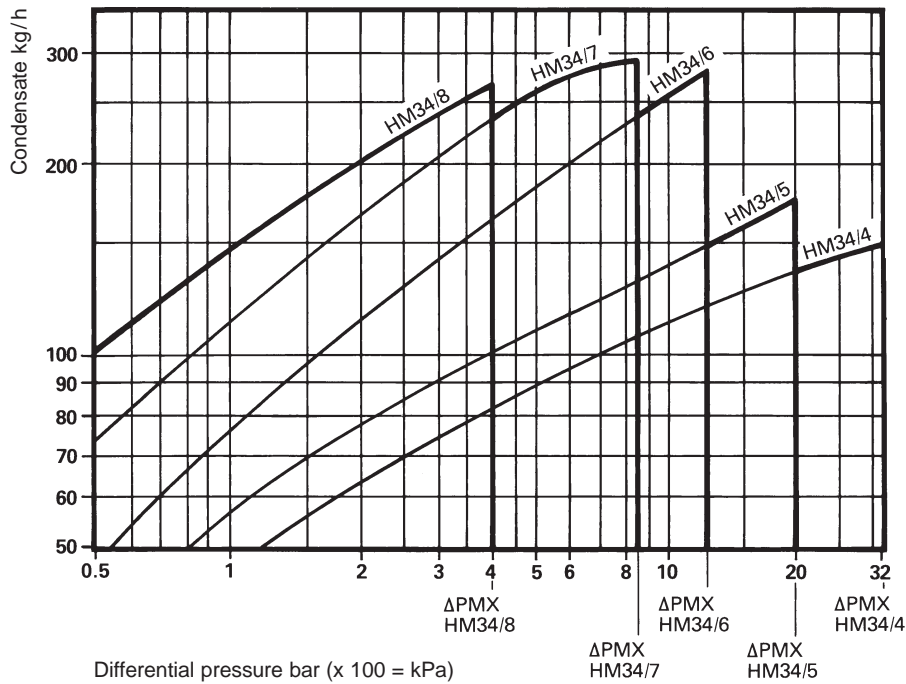


For selection see overleaf

Capacities
3/4" / DN20

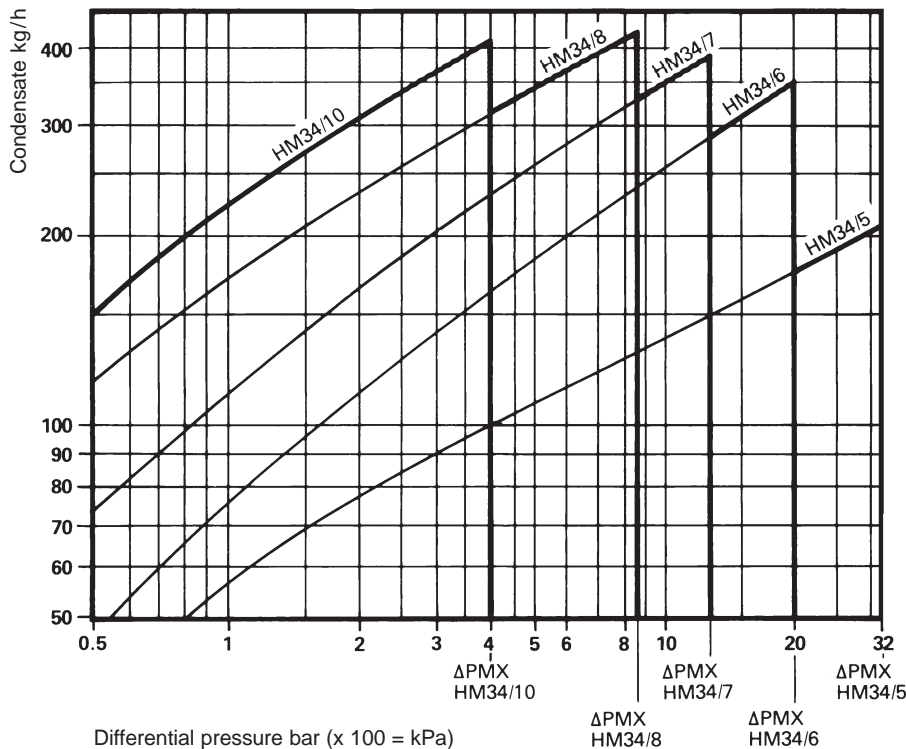

For selection see overleaf

Capacities 1" / DN25

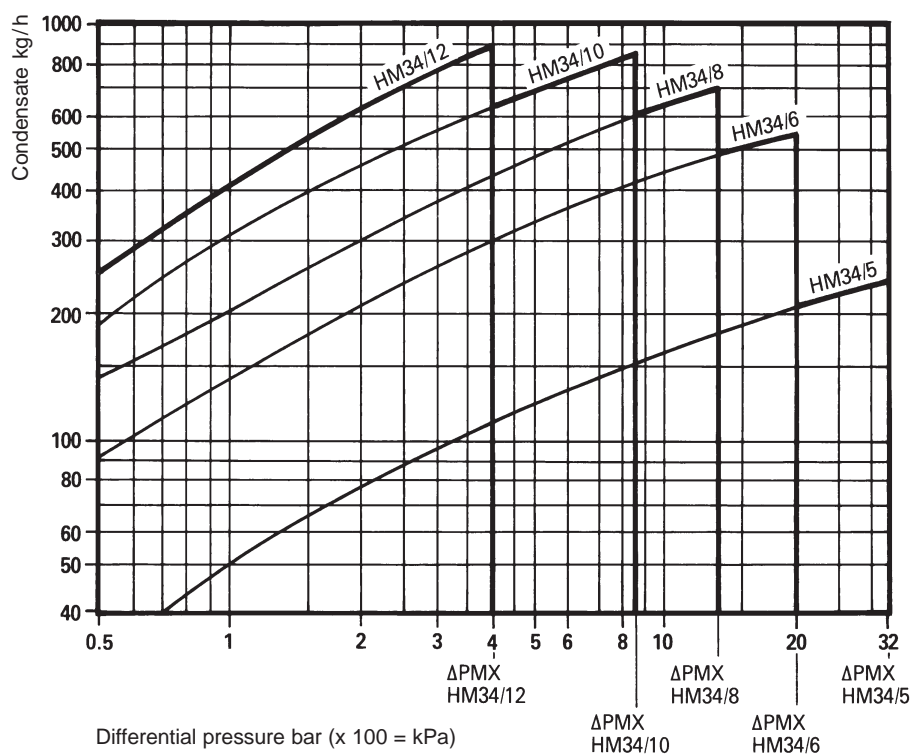

Selection note: Traps should be selected for the most appropriate working pressure differential and not on the basis of load, For example; DN25 HM34 with a load of 80 kg/h at 7 bar differential should be handled by an HM34/10 and not an HM34/5.