



Cert. No. LRQ 0963008

ISO 9001

spirax/sarco

TI-P402-07

AB Issue 4

Probe Flanges for External Level Control Chambers

Description

These flanges are designed to allow the fitting of Spirax Sarco level control/alarm probes to existing float-type boiler side chambers.

Available types

Square flanges 114 mm or 133 mm.

Round flanges 178 mm, 222 mm or 275 mm.

All flanges centrally tapped $\frac{1}{2}$ " or 1" BSP.

Limiting conditions

The maximum working pressure and temperature is dependent on the chamber to which the flange is fitted, up to a maximum pressure of 32 bar g at 239°C.

Material

Carbon steel BS 4360 Gr. 43A.
Painted finish.

Dimensions (approximate) in millimetres

Square flanges


Overall dimensions	Mounting hole centres	Mounting hole diameter	Mounting holes No.
114	86	15	4
133	100	15	4

Round flanges


Outside diameter	Mounting hole PCD	Mounting hole diameter	Mounting holes No.
178	146	15	8
222	191	19	6
275	235	22	8

How to order example:

1 off Spirax Sarco 114 mm square probe flange tapped $\frac{1}{2}$ " BSP.

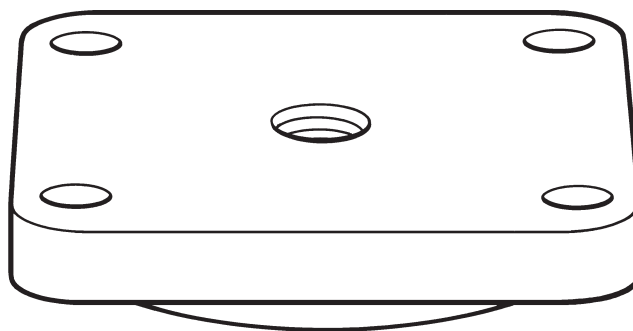

Square flange

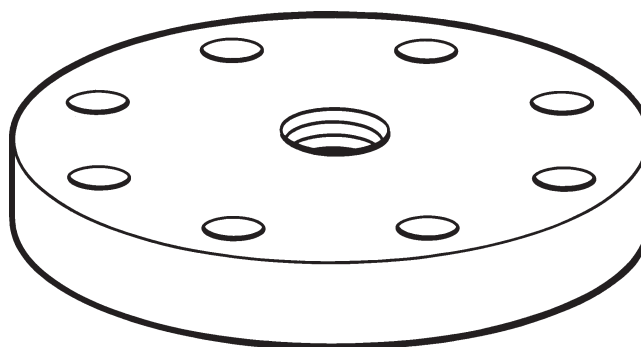

Round flange

